




Custom tooled and stamped EVA gasket



Dual roll foam surround delivers high efficiency sound reproduction.

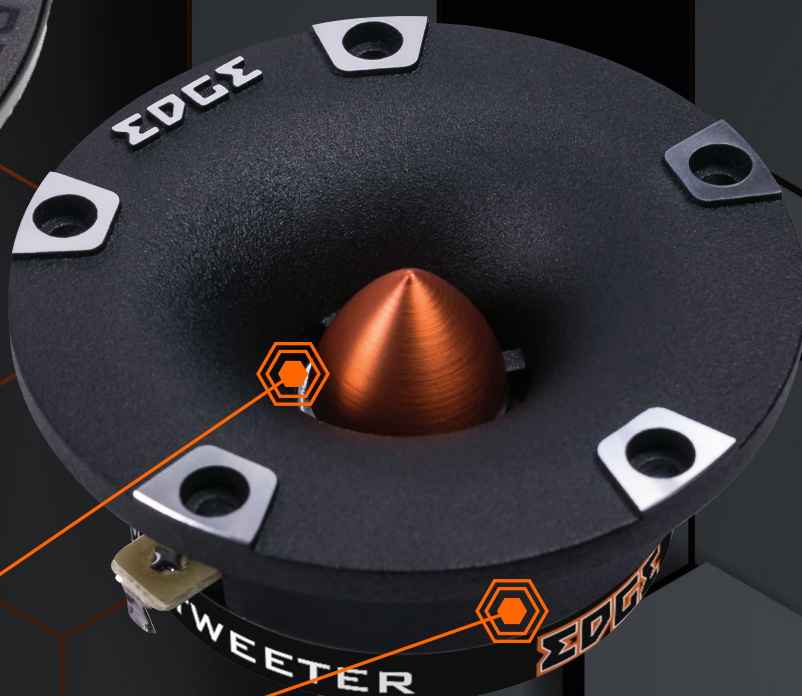

Wide frequency response delivers outstanding bandwidth..



25mm voice coil delivers high power handling.



Aluminium tweeter diaphragm delivers outstanding high frequency performance.



Model	EDBXPRO38T-E0	EDBXPRO6X-E3	EDBXPRO6-E2	EDBXPRO8-E4
Type	Pro Audio Tweeter	Pro Audio Coaxial	Pro Audio Midrange	Pro Audio Midrange
Configuration	1-way	2-way	1-way	1-way
Speaker Size	3.7" (95mm)	6.5" (165mm)	6.5" (165mm)	8" (200mm)
RMS Power	75 watts	150 watts	175 watts	200 watts
Peak Power	150 watts	300 watts	350 watts	400 watts
Sensitivity	105dB	98dB	95dB	95dB
Frequency Response	2kHz - 20kHz	125Hz - 10.5kHz	160Hz - 10kHz	125Hz - 9kHz
Impedance	4 Ohms	4 Ohms	4 Ohms	4 Ohms
Mounting Depth	1.1" (28mm)	3" (75mm)	3.1" (78mm)	3.6" (91mm)
Mounting Diameter	2.85" (73mm)	5.7" (145mm)	5.7" (145mm)	7.4" (187mm)

