



Custom tooled and stamped EVA gasket



Dual roll foam surround delivers high efficiency sound reproduction.




Custom tooled flange made from cast aluminium.



copper voice coil winding delivers high efficiency and high power handling.



Titanium tweeter diaphragm delivers outstanding high frequency performance.

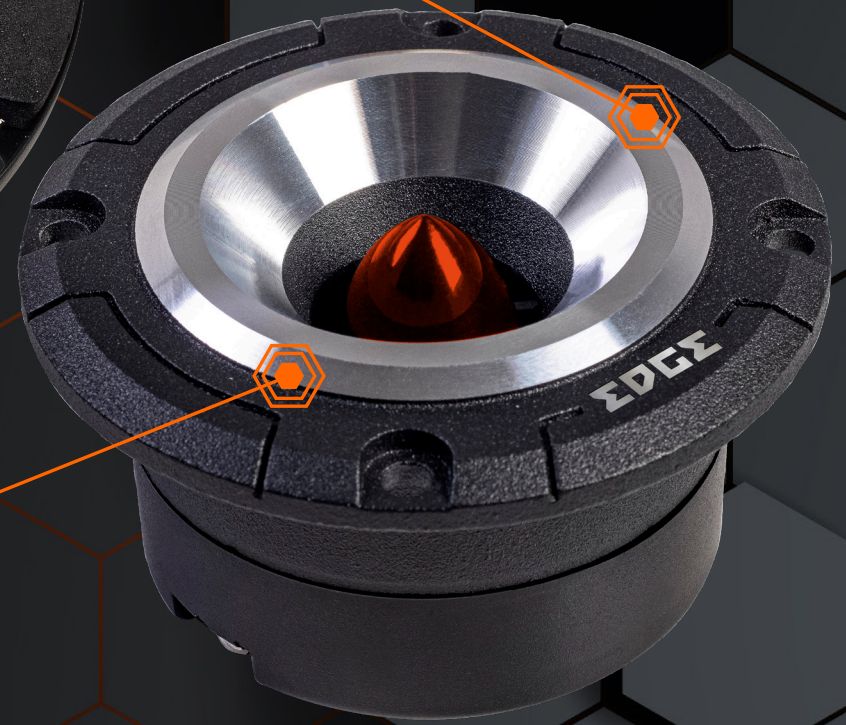

Model	EDSPRO22T-E3	EDSPRO6C-E4	EDSPRO6-E3	EDSPRO8-E3
Type	Pro audio Tweeter	Pro Audio Concentric	Pro Audio Midrange	Pro Audio Midrange
Configuration	1-way	2-way	1-way	1-way
Speaker Size	2.2" (58mm)	6.5" (165mm)	6.5" (165mm)	8" (200mm)
RMS Power	115 watts	200 watts	200 watts	225 watts
Peak Power	230 watts	400 watts	400 watts	450 watts
Sensitivity	106dB	96dB	96dB	98dB
Frequency Response	2kHz - 20kHz	90Hz - 20kHz	90Hz - 20kHz	80Hz - 20kHz
Impedance	4 Ohms	4 Ohms	4 Ohms	4 Ohms
Mounting Depth	1.3" (39mm)	2.5" (64mm)	2.5" (64mm)	3.3" (85mm)
Mounting Diameter	1.7" (43mm)	5.5" (140mm)	5.5" (140mm)	7.3" (183mm)

